



Bistrot 10T Classic

Electrical Supply

CODE: 925913120

Trays	10T 40x60 46x66 cm
Outside dimension	850 L x 930 P x 1150 H mm
Tray distance	81 mm
Power	15 kW
Weight	112 Kg
Max temperature	270° C
Power supply	400 V ~ 3PH + N + PE 400 V ~ 2PH + N + PE 230 V ~ 3PH + PE 230 V ~ 1PH + N + PE 50-60 Hz

Equipment


Led illumination Double low emissive glass Five fan speeds and semi-static cooking Program blocking with password CE Certificate Automatic control of the cooking level and load Customized programs mode ETL / NSF certification Delayed start programming Automatic detection and errors report Fan inversion, speed control and motor brake	BakePOINT Multipoint core probe High-performance thermal insulation Nine cooking modes Rounded baking chamber Automatic control of dry/steam balance inside the chamber Multi-timer function for multiple and mixed cooking Manual mode Automatic preheating Delayed cooking programming Overlap option	BakeAIR multi-fan system Blue LED for chamber cleaning check Automatic chimney opening BakeDRY Modularity Steam control in percentage BakeSTEAM Storage, viewing* and exportation of cooking data (haccp) Preset programs mode Cooling program Pre-loaded and online cookbook Openable inner glass for easy cleaning
---	---	--

Options

Heart probe MultiBakePOINT	BakeCLEAN automatic washing system	Safety rinse
Left door opening	Data logger for USB connection	

Bistrot 10T Classic

Electrical Supply

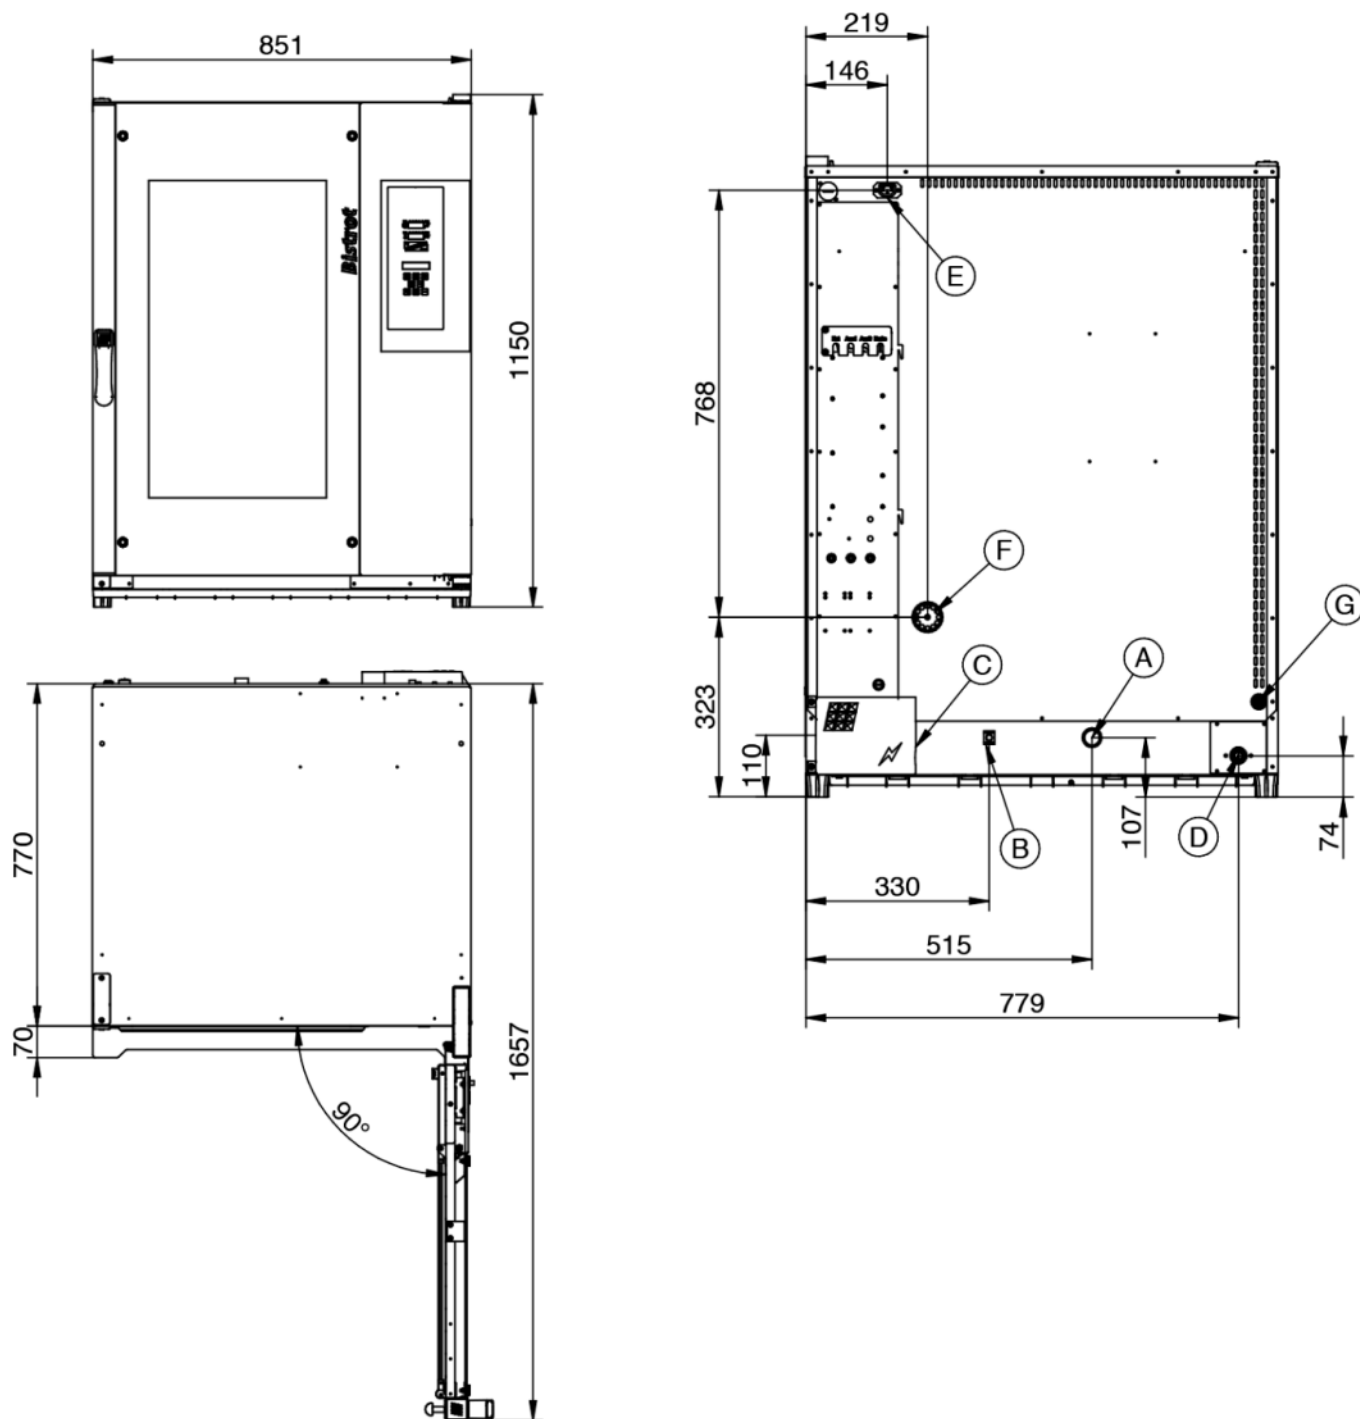

Legend




- A - Drain liquid Ø 30mm
- B - Equipotential terminal comb
- C - Electric supply
- D - Water inlet 3/4"
- E - Extracting hood supply
- F - Steam exhaust Ø 50mm

- G - Inlet for washing kit Ø 8mm


Bistrot 10T Classic

Electrical Supply

Supply and Connections

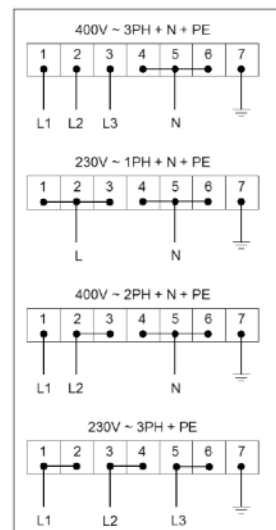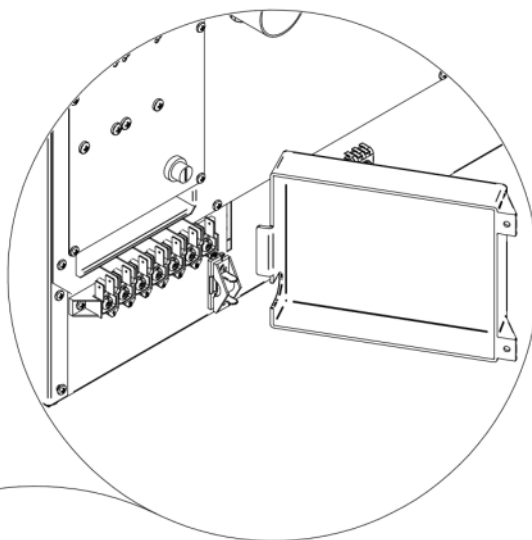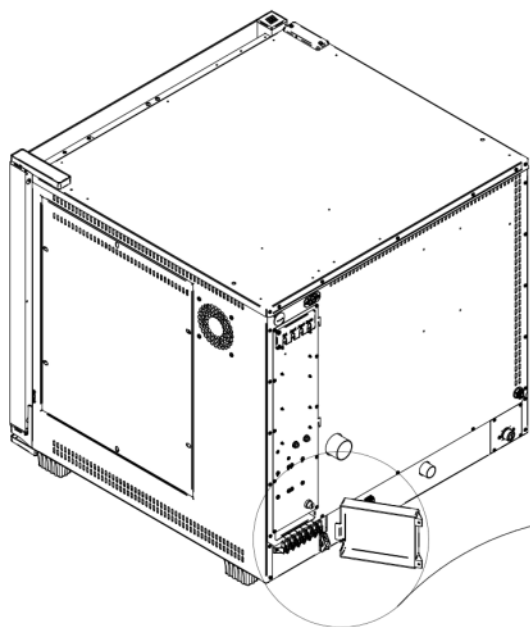

Packaging

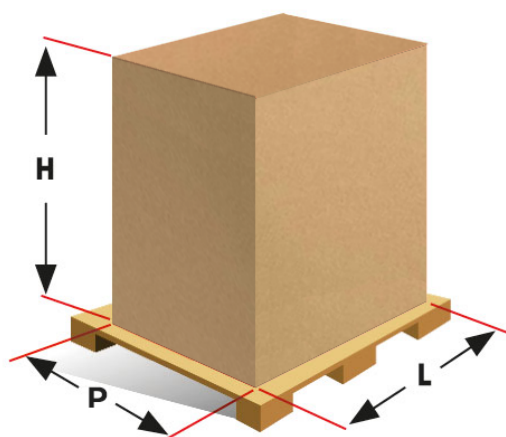

Packing size:	920 L x 1000 P x 1300 H mm
Net weight:	112 Kg
Gross weight:	132 Kg