



Bistrot 10T Classic

Gas Supply

CODE: 925913150

Trays	10T 40x60 46x66 cm
Outside dimension	850 L x 930 P x 1260 H mm
Tray distance	81 mm
Power	16,5 kW - 14.187 Kcal/h (*) - Ele. 1,15 kW
Weight	134 Kg
Max temperature	270° C
Power supply	400 V ~ 3PH + N + PE 400 V ~ 2PH + N + PE 230 V ~ 3PH + PE 230 V ~ 1PH + N + PE 50-60 Hz

Equipment



Led illumination	BakePOINT Multipoint core probe	BakeAIR multi-fan system
Double low emissive glass	High-performance thermal insulation	Premix burner BakeFIRE
Blue LED for chamber cleaning check	Five fan speeds and semi-static cooking	Nine cooking modes
Automatic chimney opening BakeDRY	Program blocking with password	Rounded baking chamber
CE Certificate	Automatic control of dry/steam balance inside the chamber	Steam control in percentage BakeSTEAM
Automatic control of the cooking level and load	Multi-timer function for multiple and mixed cooking	Storage, viewing* and exportation of cooking data (haccp)
Customized programs mode	Manual mode	Preset programs mode
ETL / NSF certification	Automatic preheating	Cooling program
Delayed start programming	Delayed cooking programming	Pre-loaded and online cookbook
Automatic detection and errors report	Openable inner glass for easy cleaning	Fan inversion, speed control and motor brake

Options

Heart probe MultiBakePOINT	BakeCLEAN automatic washing system	Safety rinse
Left door opening	Data logger for USB connection	

Bistrot 10T Classic

Gas Supply

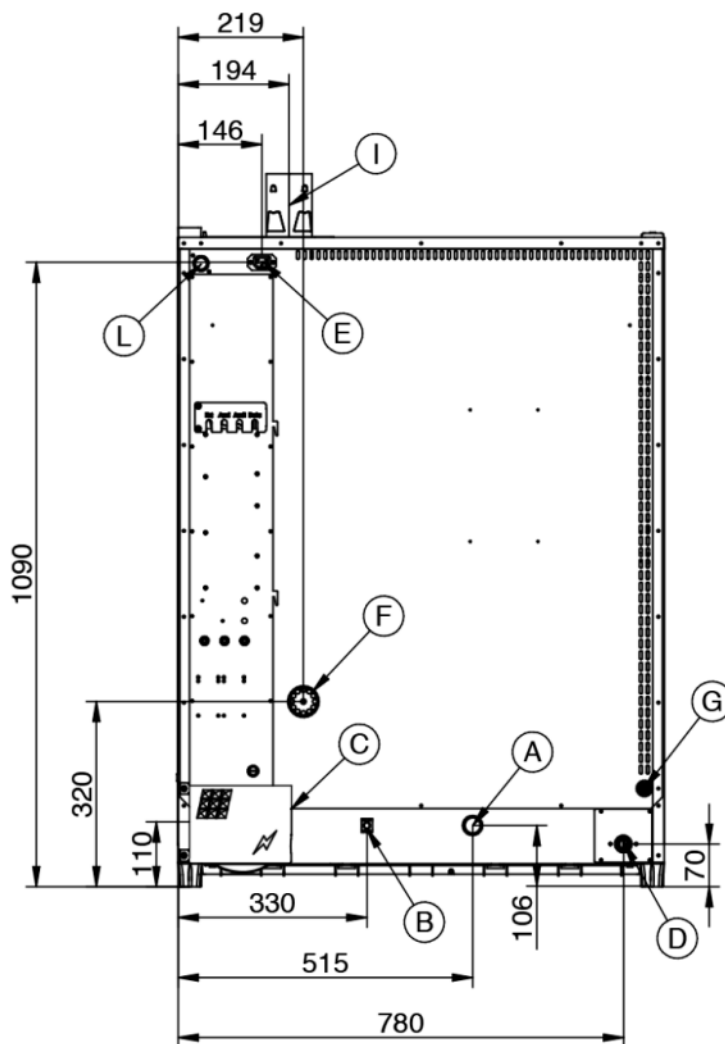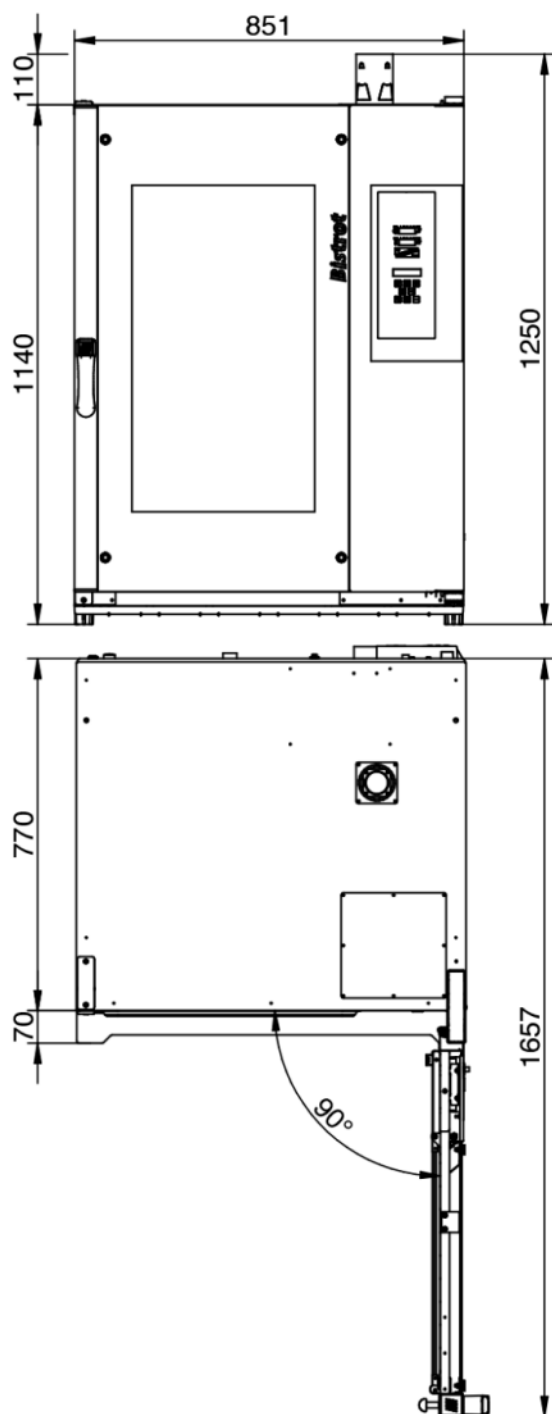

Legend




A - Drain liquid Ø 30mm
B - Equipotential terminal comb
C - Electric supply 1,15 kW
D - Water inlet 3/4"
E - Extracting hood supply
F - Steam exhaust Ø 50mm

G - Inlet for washing kit Ø 8mm
I - Ø 80mm Combustion chamber fumes exhaust
L - Gas supply inlet 3/4"

Bistrot 10T Classic

Gas Supply

Supply and Connections

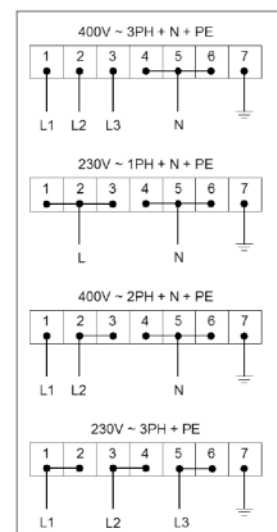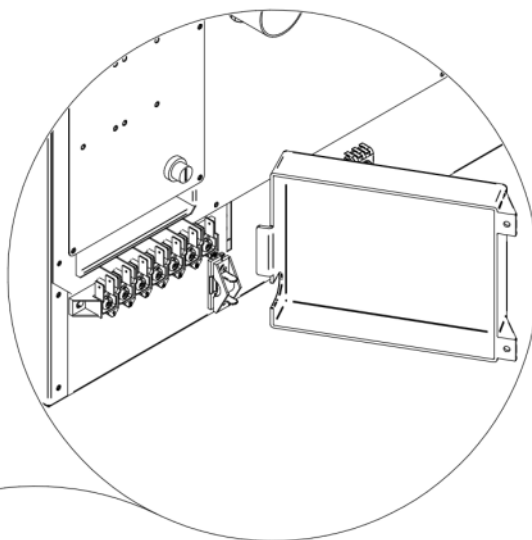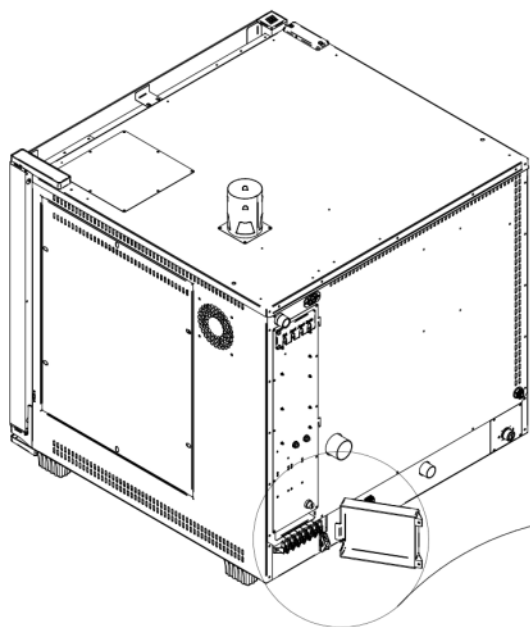

Packaging



Packing size:	920 L x 1000 P x 1400 H mm
Net weight:	134 Kg
Gross weight:	144 Kg