



Slim 5T Classic

Electrical Power Supply

CODE: 925904820

Seats	20/80
Trays	5T GN 1/1
Outside dimension	517 L x 992 P x 700 H mm
Tray distance	65 mm
Power	8,5 kW
Weight	50 Kg
Max temperature	270° C
Power supply	400 V ~ 3PH + N + PE 400 V ~ 2PH + N + PE 230 V ~ 3PH + PE 230 V ~ 1PH + N + PE 50-60 Hz

Equipment



Led illumination High-performance thermal insulation Usable also with GN2/3 and GN1/2 trays Automatic chimney opening BakeDRY CE Certificate Automatic control of the cooking level and load Customized programs mode Automatic preheating Delayed cooking programming Overlap option	BakeAIR multi-fan system Blue LED for chamber cleaning check Five fan speeds and semi-static cooking Program blocking with password Automatic control of dry/steam balance inside the chamber Multi-timer function for multiple and mixed cooking Manual mode Cooling program Pre-loaded and online cookbook Openable inner glass for easy cleaning	Double low emissive glass Water collection tray Nine cooking modes Modularity Steam control in percentage BakeSTEAM Storage, viewing* and exportation of cooking data (haccp) Preset programs mode Delayed start programming Automatic detection and errors report Fan inversion, speed control and motor brake
---	---	---

Options

Heart probe MultiBakePOINT	BakeCLEAN automatic washing system	Safety rinse
Left door opening	Data logger for USB connection	Extendable height-adjustable feet kit

Slim 5T Classic

Electrical Power Supply

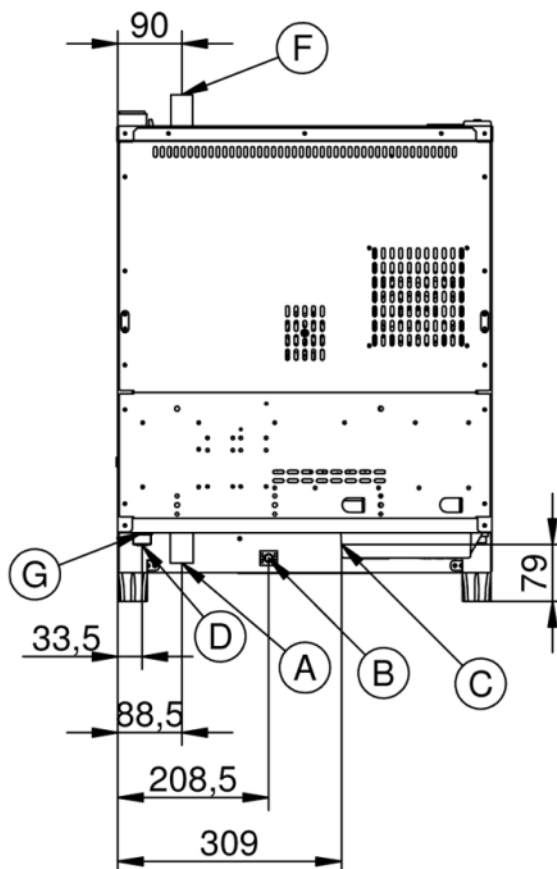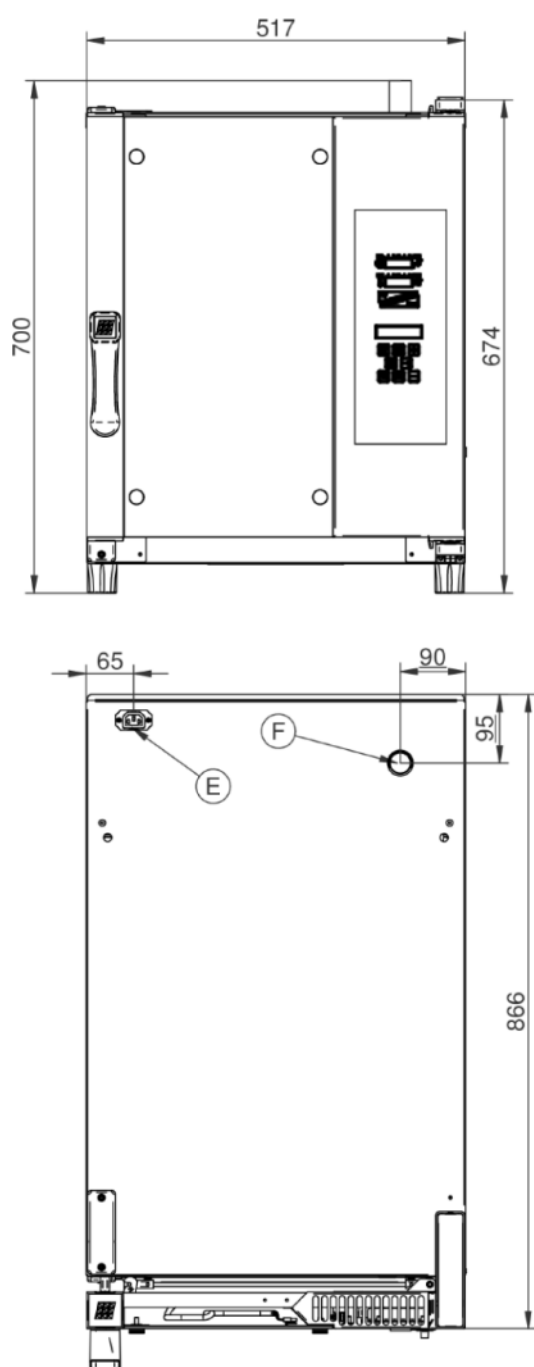

Legend


- A - Drain liquid Ø 30mm
- B - Equipotential terminal comb
- C - Electric supply
- D - Water inlet 3/4"
- E - Extracting hood supply
- F - Steam exhaust Ø 30mm

G - Inlet for washing kit Ø 8mm


Slim 5T Classic

Electrical Power Supply

Supply and Connections

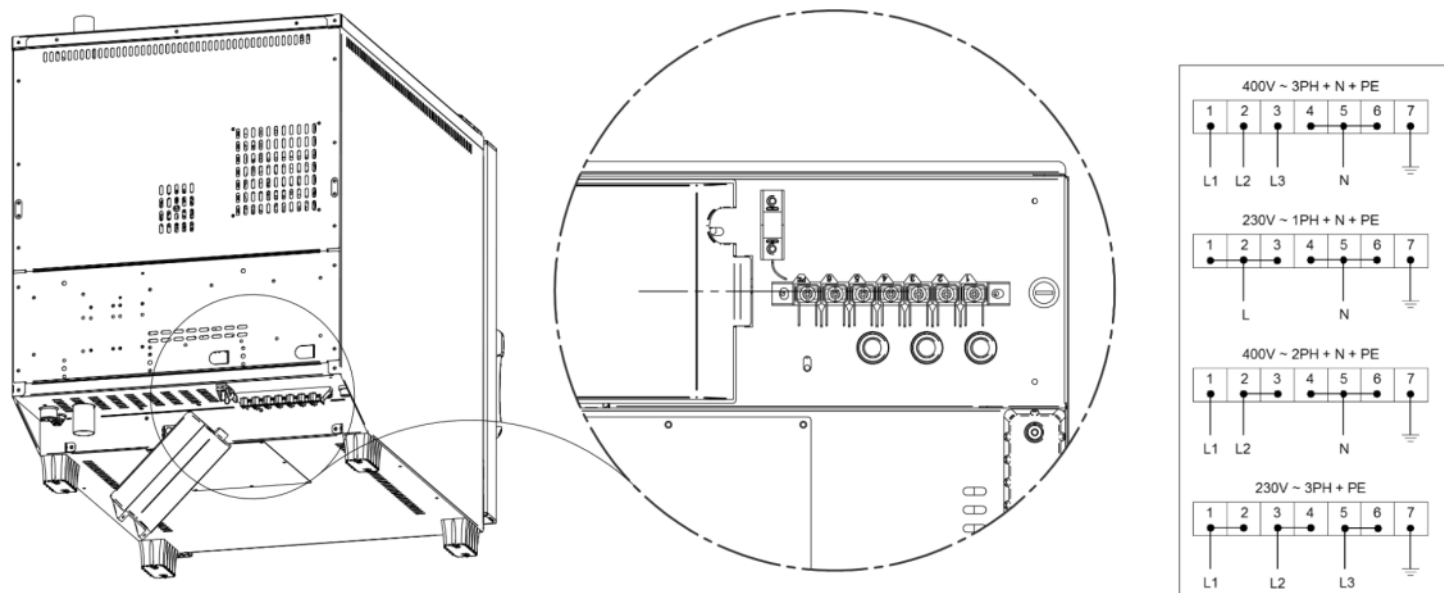

Packaging

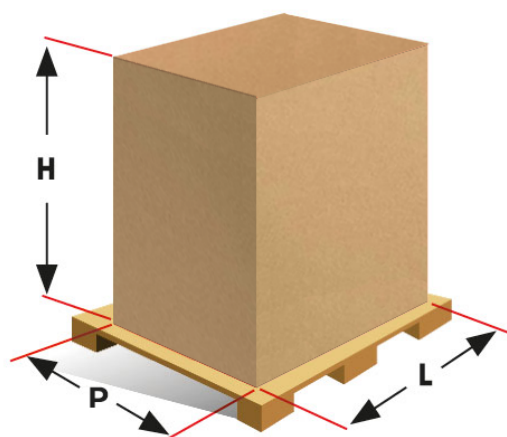

Packing size:	570 L x 970 P x 830 H mm
Net weight:	50 Kg
Gross weight:	69 Kg